



STEAM GENERATOR

STEAM BOX INDUSTRIAL

Body material

Stainless steel AISI 304 (BA)

Boiler material

Stainless steel AISI 304

(with interchangeable heating element)

Boiler volume

11 L - 12,5 L - 14 L

Tanks

Water: **20 L** | Det: **20 L**

Maximum output

11 - 14,6 - 21,8 - 29 - 36,2 kW

Boiler output

10,8 - 14,4 - 21,6 - 28,8 - 36 kW

Steam production

291 - 388 - 582 - 776 - 970 g/min.

17,5 - 23 - 35 - 46,5 - 58 Kg/h

Power supply

3~ 400V - 50/60 Hz

Steam T°

183° C

Detergent T°

90° C - 160° C

Power cord


8 m

Weight


96 Kg (36kW)

Packaging

115x65x125 cm




APPLICATIONS




Three-phase steam generator for usage in the industrial sector, with a stainless-steel body (watertight protection IPX5), **unlimited steam autonomy** thanks to the automatic refilling system with either an internal water tank (electromechanical water level control system inside the boiler – True Temp™) or directly with a water mains connection. **Possibility to inject detergent or hot water together with steam.** The steam generator's front panel is **equipped with an electric console with commands for a fimer, a thermometer and a pressure gauge;** the digital display will advise the user about the necessity to proceed with the boiler maintenance.



TOOLS

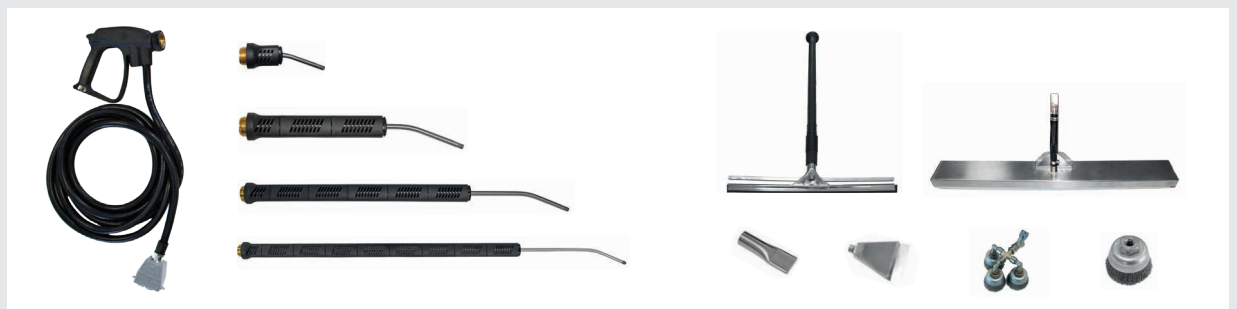

GEYSER I 10 BAR
Steam 183°C

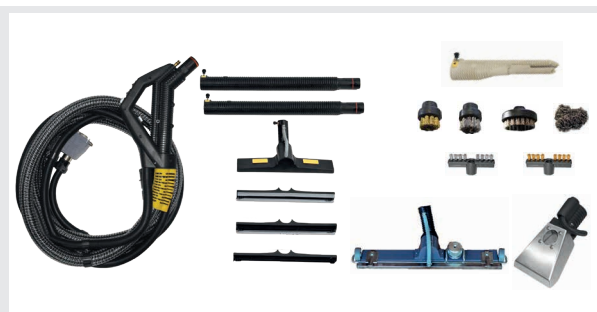

RADAMES 10 BAR
Steam & vacuum 183°C



JULY 10 BAR
Steam 183°C

