



STEAM GENERATOR

STEAM BOX PRO

Body material

Stainless steel AISI 304 (BA)

Boiler material

Stainless steel AISI 304

(with interchangeable heating element)

Boiler volume

7,3 L

Tanks

Water: 14 L | Det: 14 L

Maximum output

3,75 - 7,35 - 10,95 - 14,55 kW

Boiler output

3,6 - 7,2 - 10,8 - 14,4 kW

Steam production

97 - 194 - 291 - 388 g/min

5,9 - 11,6 - 17,5 - 23 Kg/h

Power supply

3~ 400V - 50/60 Hz

Steam T°

183° C

Detergent T°

90° C - 160° C

Vacuum output

1,2 kW

Vacuum drum capacity

Plastic: 5,5 L - Stainless steel: 7,5 L

Air flow

200 m3/h

Depression

2200 mm

Power cord

8 m

Weight


65 Kg

Packaging


115x65x125 cm



with vacuum




APPLICATIONS



Three-phase steam generator for usage in the industrial sector, with a stainless-steel body (watertight protection IPX5), **unlimited steam autonomy** thanks to the automatic refilling system with either an internal water tank (electromechanical water level control system inside the boiler – True Temp™) **or directly with a water mains connection**. Possibility to inject detergent or hot water together with steam. The steam generator's front panel is equipped with an electric console with commands for a timer, a thermometer and a pressure gauge; the digital display will advise the user about the necessity to proceed with the boiler maintenance.



TOOLS

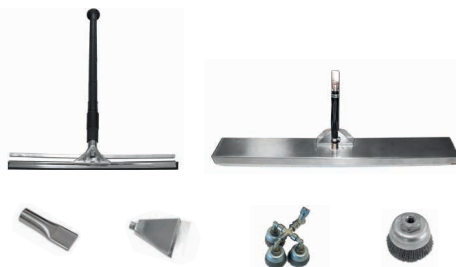

GEYSER I 10 BAR
Steam 183°C



RADAMES 10 BAR
Steam & vacuum 183°C



JULY 10 BAR
Steam 183°C

